

USB to DVI Graphics Adapter / Converter

USB2DVIE



CONVERGE**AV** **StarTech.com**

Making hard-to-find easy!

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Table of Contents

Introduction	1
Features	1
Package Contents	1
Installation.....	2
Windows XP	2
Multiple USB2DVIE Adapter Installation.....	3
Windows Vista™.....	4
Multiple USB2DVIE Adapter Installation.....	6
Verifying Device Driver Installation	6
USB2DVIE Operation.....	7
Primary Mode	7
Mirror Mode	7
Rotate Mode	8
Off Mode.....	8
Setting the Resolution	8
FAQs/Troubleshooting	10
Specifications	11
Supported Resolutions	11
General Specifications.....	12
Technical Support	13
Warranty Information	13

Introduction

Thank you for purchasing a StarTech.com USB to DVI Graphics Adapter / Converter. The perfect solution for turning an available USB 2.0 port into a DVI-I (digital or analog supported) connection, USB2DVI provides a high quality, multi-display capabilities that can be used in a variety of settings in notebook or desktop applications.

Capable of running up to five additional displays with multiple USB2DVIE adapters from one source simultaneously, the USB2DVI USB to DVI Graphics Adapter / Converter is easy to install and perfect for adding multiple displays to maximize your display capability in any multimedia environment.

Features

- No power adapter required
- Simple installation
- Supports resolutions up to 1600x1200 and 1680x1050 (for widescreen / format displays) @ 32 bits

Package Contents

- 1 x USB to DVI Adapter
- 1 x Instruction Manual
- 1 x Driver CD


Installation

Please note: The following installation steps must be completed prior to connecting USB2DVIE to a host computer, to ensure proper functionality.


Windows XP

1. Insert the Driver CD into the CD/DVD-ROM drive; the setup program should launch automatically. If the setup program does not begin automatically, click on the **Start** button, then on **Run**.


When the **Run** command line appears, click on **Browse** and select the **Setup.exe** file (D:\setup.exe, where D:\ refers to the CD/DVD-ROM drive).



2. When the Driver Installation Wizard appears, click **Next** to continue.

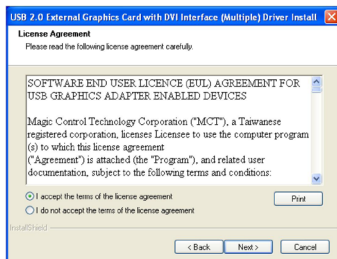

3. When the License Agreement appears, please read it and select **I accept the terms of the license agreement**, then click **Next**.
4. Connect the external display device (monitor/projector) to the DVI port provided by USB2DVIE, then turn on the display.
5. If you wish to install multiple USB2DVIE adapters (up to 5), please skip to the section titled **Multiple USB2DVIE Adapter Installation**, otherwise click on **Finish**; to conclude installation, please select **Yes, I want to restart my computer now**, and click **Finish** again.



Once the computer has rebooted, the extended display will be shown on the secondary display.

Multiple USB2DVIE Adapter Installation

Once steps #1-5 have been completed:

- a. Select **No, I will restart my computer later** and click **Finish** to continue on to the installation of the next USB2DVIE unit.
- b. Connect another display device to the DVI connector of the second USB2DVIE Adapter, then turn on the display.
- c. Connect the USB 2.0 connector provided by the second USB2DVIE adapter to a second available USB 2.0 port on the host computer. The


Windows Vista™

Please note: The following installation steps must be completed prior to connecting USB2DVI to the host computer, to ensure proper functionality.


1. Insert the Driver CD into the CD/DVD-ROM drive; the setup program should launch automatically. If the setup program does not begin automatically, click on the **Start** button, then on **Run**.

When the **Run** command line appears, click on **Browse** and select the **Setup.exe** file (D:\setup.exe, where D:\ refers to the CD/DVD-ROM drive).


2. The Driver Installation Wizard window will appear. Click **Next** to continue.




3. When the License Agreement appears, please read it and select **I accept the terms of the license agreement**, then click **Next**.

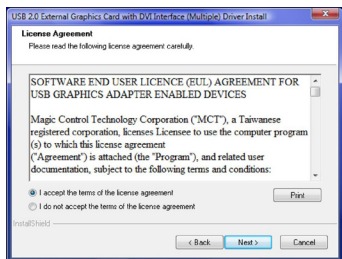


4. When the Windows Security warning dialogue box appears, please select Always trust software from “Magic Control Technology Corp.”, then click on **Install** to continue.



5. Connect the external display device (monitor/projector) to the DVI connector of USB 2.0 DVI-I Adapter and power on the display.
6. Click **Finish** to exit the Driver Wizard, then connect the USB2DVIE Adapter to an available USB 2.0 port of your PC or Notebook.



7. To install multiple USB2DVIE adapters (up to 5), skip to the following section, titled **Multiple USB2DVIE Adapter Installation**, otherwise, select **Yes, I want to restart my computer now** and click **Finish** again.



Multiple USB2DVIE Adapter Installation

Once the first installation steps (1-6) have been completed,

- Select **No, I will restart my computer later** and click **Finish** to continue on to the installation of the next USB2DVIE unit.
- Connect another display device to the DVI connector of the second USB2DVIE Adapter, then turn on the display.
- Connect the USB 2.0 connector provided by the second USB2DVIE adapter to a second available USB 2.0 port on the host computer. The driver installation will begin automatically.


Follow steps a - c for each additional USB2DVIE adapter you wish to install, otherwise, please select **Yes, I want to restart my computer now** and click **Finish** to complete the driver installation.

Verifying Device Driver Installation

To verify that driver installation was successful:

- Right-click on **My Computer**, and select **Properties**. Click on the Hardware tab, then click on the **Device Manager** button.


Click on the plus sign (+) next to **Display adapters** and **Universal Serial Bus controllers**. For one installed adapter, USB Graphics Device will appear once under the Display Adapters as (Extend) and once for (Mirror); similarly, the USB 2.0 Graphics Device will appear under the Universal Serial Bus Controllers (once).

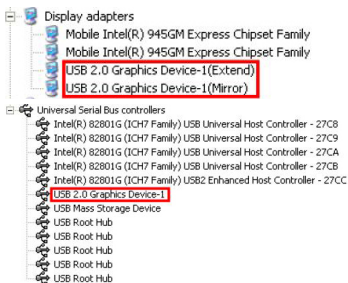

driver installation will begin automatically.

Follow steps a - c for each additional USB2DVIE adapter you wish to install.

USB2DVIE Operation



The USB2DVIE Adapter can support LCD or CRT monitors and offers four distinct modes of operation: Primary, Extended, Mirror and Rotate, which can be selected by clicking on the "UD" icon in the taskbar.

Primary Mode

Selecting Primary mode will set the secondary display adapter as the main display adapter in the system. The system's primary adapter (and monitor) will automatically switch to act as the extended desktop.

Please Note: Some display utilities and drivers that ship with AGP and built-in display adapters will prevent this option from working on some systems. For the USB-VGA (Primary) setting to take effect, you must first disable the original display utility (typically located in the system tray).

Extend Mode (Default)

This mode extends the image shown on the primary display onto the secondary display.

You can change the relative position of this extension under the Display Properties (Go to Control Panel -> double click on **Display** and select the **Settings** tab).

Mirror Mode

This setting will mirror the image from your original desktop onto the secondary desktop.

The screen resolution setting on the secondary monitor will follow the primary screen's resolution. For example, if the primary resolution is 1024x768 @32bit, the secondary monitor's resolution will be the same. But, if the selected resolution setting is not supported by the primary screen, a warning dialogue box will be displayed and the suggested screen resolution will be shown.

Rotate Mode


This feature enables the user to rotate the secondary display image by 0° (default), 90°, 180° or 270°.

Off Mode

This option disables the USB 2.0 DVI-I Adapter on the system.

Setting the Resolution


Similar to the operating modes offered, the display resolution can be configured from the **UD** icon in the taskbar. Alternatively, the display resolution can be modified from the **Display Properties** feature (right-click on the desktop, select **Properties** then **Settings**).

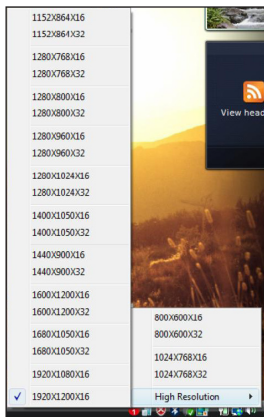


A list of supported resolutions is available in the **Technical Specifications** section.

Uninstalling the USB2DVIE

1. Disconnect the USB2DVIE unit(s) from the computer.
2. Click on the **Start** button and select **Control Panel**. Double-click on the **Add or Remove Programs** icon.
3. Click to highlight “USB 2.0 External Graphics Card with DVI Interface (Multiple)”, then click on the **Remove** button.

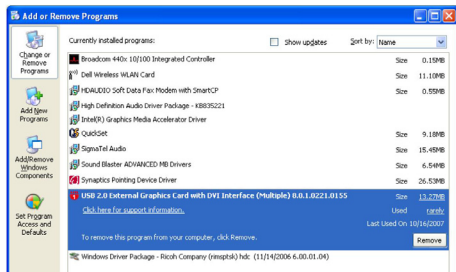

4. Select “Yes, I want to restart my computer now” then click **Finish** to reboot the computer.

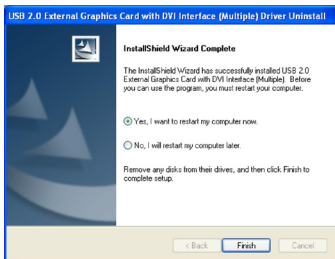

FAQs/Troubleshooting

Q: Why can't I make the USB2DVIE Adapter the primary display?

A: Some video cards are shipped with a utility that prevents other video cards from being set as the primary adapter. Check the bottom right hand corner of the taskbar for the video card graphics utility and disable the utility before switching the USB2DVIE to be the primary display.

Q: Why won't my DVD player work when I move it over to the extended display?

A: Some DVD playback software packages do not support playing on a second display adapter of any kind. You may try to open the program in the secondary display first before playing the DVD.

Q: How come my video will not play on Media Player if I move it over to the extended desktop?

A: Check that you have moved the Media Player window completely over to the second screen.

Q: Why does my mouse not move past the right side of the screen, when it should be on the extended desktop?

A: Check the display settings and make sure that your display number '2' is on the right side of display number '1'. You can rearrange how Windows treats each display in relation to one another in the Display Properties Settings.

Q: There are lines running horizontally up and down my screen.

A: This is due to a low refresh rate setting. You can change this in the Display Properties Settings Advanced Monitor. Make sure you select the USB2DVIE adapter first, and ensure the refresh rate is not set to exceed the capability of the display.

This may damage your monitor. You can also try to reset/refresh/resynchronize your monitor.

Q: Direct3D does not work?

A: This is a current limitation of the adapter. Please check for driver updates in the future for additional support, on <http://www.startech.com>.

Specifications

Supported Resolutions

Resolution	VGA	DVI	Refresh Rate
2048 x 1280	16 bit	N/A	60Hz
1920 x 1200	16 bit	N/A	60Hz
1920 x 1080	16 bit	N/A	60Hz
1680 x 1050	16 bit	N/A	60Hz
1600 x 1200	16 bit, 32 bit	16 bit, 32 bit	60Hz
1440 x 900	16 bit, 32 bit	16 bit, 32 bit	60Hz
1360 x 768	16 bit, 32 bit	16 bit, 32 bit	60Hz
1280 x 1024	16 bit, 32 bit	16 bit, 32 bit	60Hz
1280 x 960	16 bit, 32 bit	16 bit, 32 bit	60Hz
1280 x 800	16 bit, 32 bit	16 bit, 32 bit	60Hz
1280 x 768	16 bit, 32 bit	16 bit, 32 bit	60Hz
1280 x 720	16 bit, 32 bit	16 bit, 32 bit	60Hz
1152 x 864	16 bit, 32 bit	16 bit, 32 bit	60Hz
1024 x 768	16 bit, 32 bit	16 bit, 32 bit	60Hz
800 x 600	16 bit, 32 bit	16 bit, 32 bit	60Hz

General Specifications

Built-in Memory	16MB RAM
Maximum Displays	Connect up to five adapters on one PC
OS Support	Windows 2000/XP/Vista™
Video Signal	DVI-D and DVI-A (digital and analog)
System Requirements	1.2Ghz or higher CPU; 512MB RAM An available USB 2.0 Port; 30MB of hard drive space 800x600 or higher resolution capable monitor
Connector Types	1 X DVI-I Single Link Female 1 X USB Mini B 5 pin Female

Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

Warranty Information

This product is backed by a lifetime warranty. In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.



StarTech.com has been making “hard-to-find easy” since 1985, providing high quality solutions to a diverse IT and A/V customer base that spans many channels, including government, education and industrial facilities to name just a few. We offer an unmatched selection of computer parts, cables, A/V products, KVM and Server Management solutions, serving a worldwide market through our locations in the United States, Canada, the United Kingdom and Taiwan.

Visit **www.startech.com** today for complete information about all our products and to access exclusive interactive tools such as the Cable Finder, Parts Finder and the KVM Reference Guide.